


EUROSTYLE EUROLOK™ BARGE DETAIL (TYPE II)

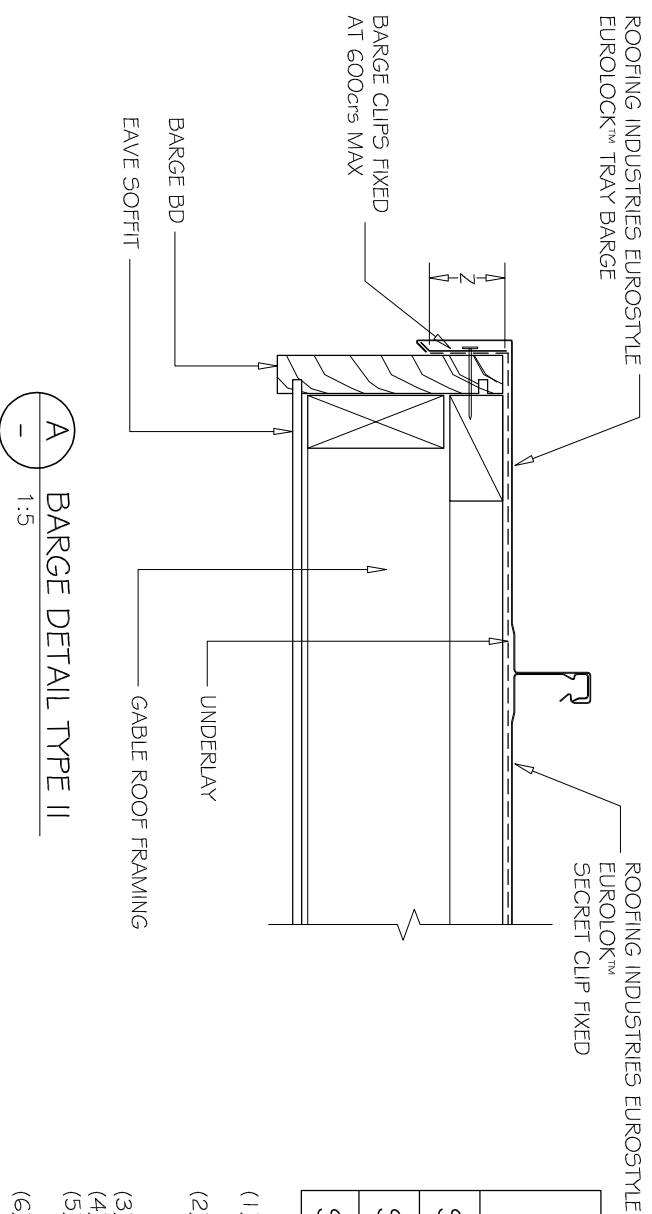


A BARGE DETAIL TYPE II
1:5

DETAIL NO. EE50R001B-1
DATE DRAWN 06/05/16
FILE REFERENCE R1-EE50R001B-1.DWG

WIND ZONE	MINIMUM	
	Z (5)	
SITUATION 1 (1)	50mm (4)	
SITUATION 2 (2)	75mm (4)	
SITUATION 3 (3)	90mm (4)	

- (1) SITUATION 1: IN LOW, MEDIUM OR HIGH WIND ZONES, WHERE ROOF PITCH IS 10° OR GREATER.
 (2) SITUATION 2: FOR ALL ROOF PITCHES IN LOW, MED, HIGH AND VERY HIGH WIND ZONES, WHERE ROOF PITCH IS LESS THAN 10°.
 (3) SITUATION 3: FOR ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
 (4) EXCLUDING DRIP EDGE.
 (5) INCREASE DISTANCE 'Z' BY 25mm WHEN AGAINST A PROFILED SURFACE.
 (6) ALLOW FOR SEPERATION FROM ANY CORROSIVE TIMBER TREATMENTS.

- NOTES:
- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'. Eurostyle falls outside the criteria of E2/AS1 and this document is therefore not applicable.
 - The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
 - Details of the supporting structure are indicative only and are the responsibility of the building designer.
 - Underlay selection and building wrap types are the responsibility of the designer.
 - These details are for Roofing Industries' profiles as nominated and may not be applicable to other profiles.
 - This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
 - These details to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
 - Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metaloofing.org.nz or E2/AS1.

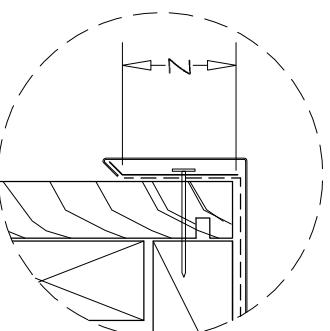

©COPYRIGHT DETAIL 2016

