


EUROSTYLE ROOFING TYPICAL APRON FLASHING (Cavity) TYPE 1

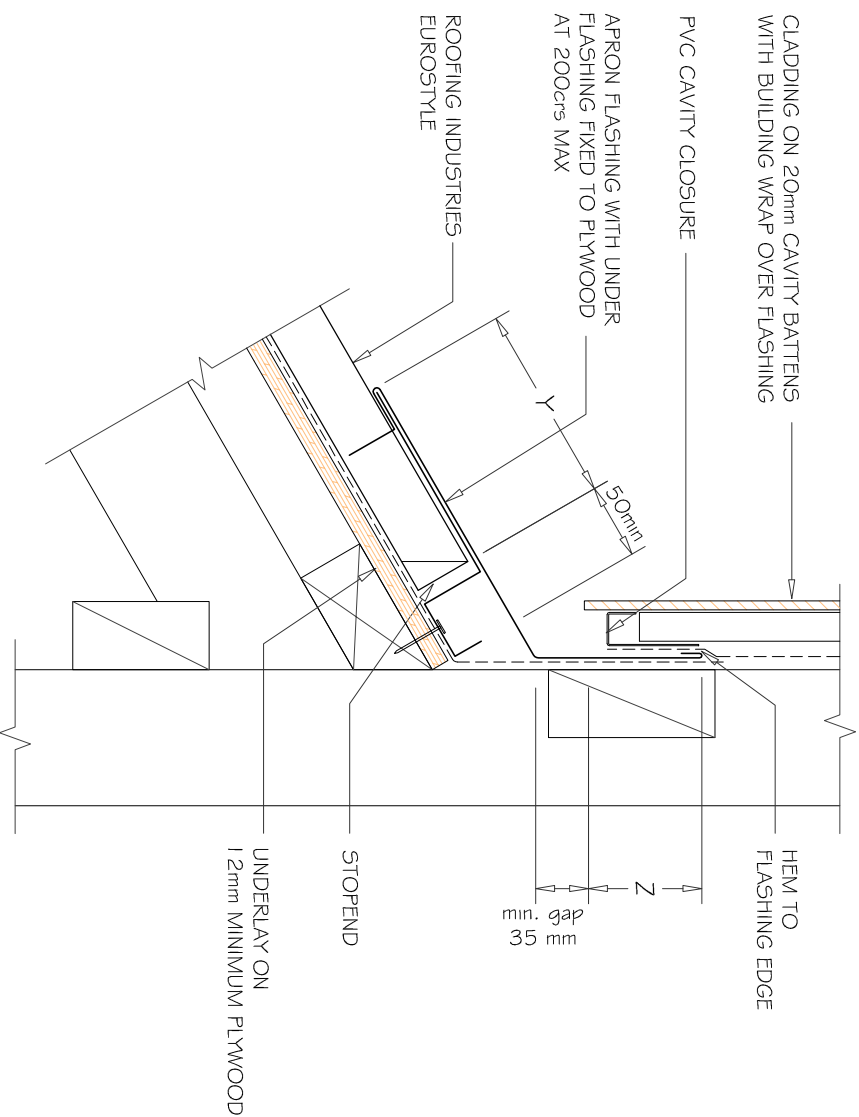

A
-
TYP APRON FLASHING PROFILE
1:5

DETAIL NO. ERO11B
DATE DRAWN 19/10/09
FILE REFERENCE RI-ERO11B.DWG

WIND ZONE	MINIMUM	
	Z	Y
SITUATION 1 (1)	75mm (3)	130mm
SITUATION 2 (2)	100mm (3)	130mm

- NOTES:
- DESIGNER TO ENSURE DURABILITY OF FLASHING MATERIAL:
- (1) SITUATION 1 : IN LOW, MEDIUM OR HIGH WIND ZONES, WHERE ROOF PITCH IS 10° OR GREATER.
 - (2) SITUATION 2: FOR ALL ROOF PITCHES IN VERY HIGH WIND ZONES, FOR ALL WIND ZONES WHERE ROOF PITCH IS LESS THAN 10°.
 - (3) IF HEM IS NOT USED INCREASE DISTANCE BY 25mm.
 - (4) USE 'ENKAVENT' NYLON ROOF VENTILATED MATTING LAID BETWEEN UNDERLAY AND EUROSTYLE WHEN NECESSARY FOR VENTILATION, DRAINAGE AND NOISE CONTROL.
 - (5) ALLOW FOR SEPERATION FROM ANY CORROSIVE TIMBER TREATMENTS.

- NOTES:
- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by Roofing Industries'. Eurostyle falls outside the criteria of E2/A5.1 & this document is therefore not applicable
 - The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project. Details of the supporting structure are indicative only and are the responsibility of the building designer.
 - Underlay selection and building wrap types are the responsibility of the designer.
 - These details are for Roofing Industries profiles as nominated and may not be applicable to other profiles.
 - This drawing is the copyright of Roofing Industries' and can only be copied or reproduced with their permission.
 - Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metaloofing.org.nz or E2/A5.1

