
RESIDENTIAL TRUE OAK® CORRUGATE INTERNAL GUTTER

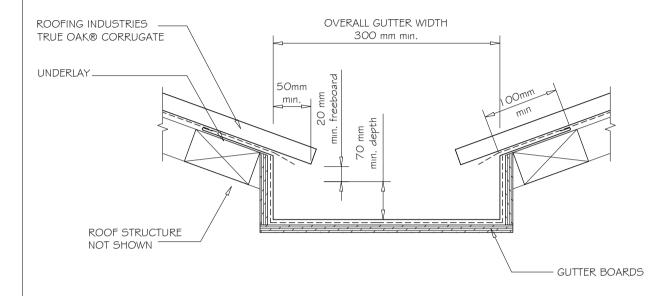

INTERNAL GUTTER TRUE OAK® CORRUGATED PROFILE

NOTES:

- These details are generally in compliance with E2/AS I and/or the NZ Metal Roof \$ Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity batters are indicative only
 and are the responsibility of the building designer. For steel framed buildings
 thermal break cavity batters may be required.
- Underlay selection and building wrap types are the responsibility of the
 designer, Netting or other support is generally required at roof pitches less
 than 8 degrees combined with a self supporting paper. At roof pitches of 8°
 and above where non self supporting paper is used or purlin spacing is in
 excess of self supporting criteria, netting or other support should be used.
 Alternative support to netting should be used in severe coastal environments
 including when aluminium is used.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof \$ Wall Cladding Code of Practice www.metalroofer.org.nz or E2/AS I

DETAIL NO. RTCROO7A

DATE DRAWN 25/05/14

FILE REFERENCE RI-RTCROO7A.DWG

NOTES:

- (1) GUTTERS INSTALLED OVER ROOF UNDERLAY IF GUTTER BOARDS ARE TREATED TIMBER.
- (2) INTERNAL GUTTER SHALL BE SIZED TO SUIT THE ROOF CATCHMENT AREA, BUT SHALL BE NO LESS THAN SHOWN IN THIS FIGURE.
- (3) INTERNAL GUTTER SHOULD BE MADE FROM NONFERROUS METAL'S COMPATIBLE WITH THE ROOFING MATERIAL.
- (4) GUTTER SIZES TO BE CALCULATED FROM EI/ASI
- (5) GUTTER APRON REQUIRED TO ALL ROOFS UNDER 8° WHERE ALL OF THE FOLLOWING CONDITIONS No. 6-8 ARE MET.
- (6) ROOFS UNDER 10° PITCH.
- (7) WHERE EAVES OVERHANG IS LESS THAN OR EQUAL TO LOOmm.
- (8) WHERE WIND ZONES ARE VERY HIGH OR EXTRA HIGH.
- (9) DESIGNER MAY ALSO CHOOSE TO INCLUDE OPTIONALLY.

©COPYRIGHT DETAIL 2014

